

12

EUROPEAN PATENT APPLICATION

21 Application number: 83111389.9

51 Int. Cl.³: **F 16 F 1/44, B 60 G 11/22**

22 Date of filing: 14.11.83

30 Priority: 29.11.82 IT 2448382

71 Applicant: **INDUSTRIE PIRELLI S.p.A.**, Piazzale Cadorna 5, I-20123 Milan (IT)

43 Date of publication of application: 13.06.84
Bulletin 84/24

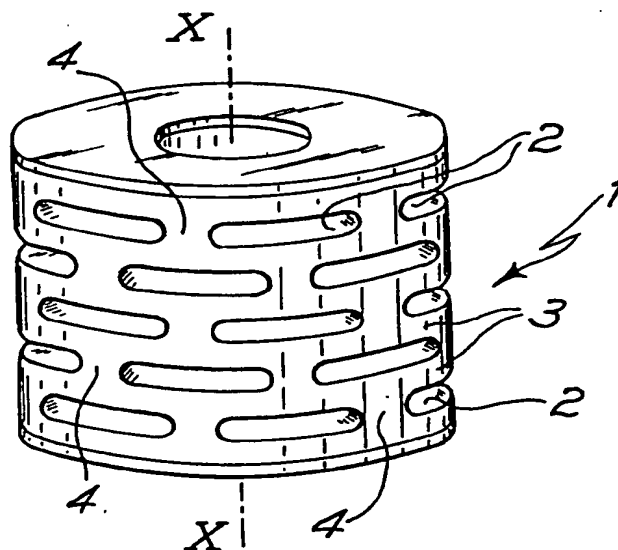
72 Inventor: **Tangorra, Giorgio**, Via Ramazzotti 12, Monza (Milan) (IT)

64 Designated Contracting States: **DE FR GB**

74 Representative: **Mariani, Giorgio, Dr. et al**, **INDUSTRIE PIRELLI S.p.A. Direzione Brevetti Piazzale Cadorna, 5, I-20123 Milano (IT)**

54 Shock-absorbing device.

57 Shock-absorbing device (1) comprising an elastomeric body provided with a plurality of cavities (2) arranged on transversal planes of the body; the cavities of one plane are offset with respect to the cavities of the adjacent planes. The portion of elastomeric material (4) comprised between two adjacent cavities in one same transversal plane is arranged substantially in central position with respect to the underlying cavity.



EP 0 110 233 · A2

SHOCK-ABSORBING DEVICESpecification

5 The present invention refers to a shock-absorbing device and more particularly to a shock-absorbing device used for suspensions in general and as a device contrasting vibrations, to be used among other things in the motor vehicle and railway field. The shock-absorbing devices have
10 the task of avoiding the arising of troublesome vibrations with the consequent production of negative mechanical stresses for a correct operation.

These devices must assure and guarantee a continuous
15 operation in time and must be able to absorb the energy received, dissipating a great quantity of said energy so as to return only a very small part in the subsequent phases.

Among the known shock-absorbing devices there are cited those
20 based on the dissipation of energy due to friction phenomena.

Said devices based on the dissipation of the received energy due to friction phenomena, are used satisfactorily in many
25 applications; however, their use can sometimes produce the drawback of a rapid wear of the parts in movement compromising thus the operation of the device itself.

Further devices are known in which the damping effect is
30 obtained by viscous type dissipation.

Generally, these devices comprise a chamber in which there is a viscous liquid; a plate connected with the movable element

1 acts on the liquid.

During the movement of to the element, the plate determinates
the lamination of the liquid between the walls of the chamber
5 and the plate itself.

Said devices, although causing the damping of the oscillating
element, have the drawback of transmitting the high frequency
oscillations with the consequence of transmitting, for
10 example in case of suspensions for motorvehicles, annoying
oscillation to the passenger.

A further drawback of the shock-absorbing devices based on
the use of viscous fluids resides in the complicated
15 realization of the chamber containing said liquid, owing to
the particular problem of the necessary fluid-tight means in
order to assure the correct operation of the whole device.

Also, there are known further shock-absorbing devices using
20 bodies of elastomeric material with particularly hysteretic
compounds. Unfortunately, said devices being sometimes
particularly high, when subjected to the force to be
absorbed, undergo lateral bendings with consequent
misalignment and irregular operation of the device.

25 Said negative aspect of the shock-absorbing devices using
high hysteresis elastomeric material depends on the fact that
the compression force is exerted on a body in which there is
a deformation without a variation of volume, so that the
30 higher the body is, the greater the possibility of a lateral
bending will be.

A further drawback of the cited devices resides in the fact

1 that the hysteretic compound theoretically is apt to absorb a
strong percentage of energy with modest return of said
energy, however, very often it happens to find a different
condition in the operation, since being the compound
5 particularly rigid, can originate excessive values of its
reaction causing thus an ineffective damping effect.

Therefore, the aim of the present invention is a shock-
absorbing device apt to damp the oscillations in the elements
10 contrasting vibrations or in the suspensions of railway
vehicles or of motorvehicles devoid of the cited drawbacks.

The object of the present invention is a shock-absorbing
device comprising a body of elastomeric material having an
15 axis aligned with the direction of the force to be damped,
characterized by the fact that said body comprises a
plurality of cavities distributed along planes transversal to
said axis, said cavities being arranged through the thickness
of the elastomeric material, the cavities of each transversal
20 plane being arranged at a distance in axial sense, offsett
and partially overlapped with respect to the cavities of the
adjacent transversal planes, the portion of elastomeric
material comprised between two adjacent cavities in one same
transversal plane being arranged substantially in central
25 position with respect to the width of the cavity of the
immediately underlying transversal plane.

Therefore the essential characteristic of the invention is a
body of elastomeric material provided with a plurality of
30 cavities passing through its thickness, said cavities being
offset with respect to one another according to a pre-fixed
geometry, so that in consequence of the compressive force
exerted on the body itself, the parts full of elastomeric

1 material will be obliged to penetrate into the immediately
underlying cavities.

5 In this way there is obtained a movement and a deep
deformation of the whole elastomeric structure with
consequent high absorption of energy.

Of course, to a greater number of cavities there will
correspond, in consequence of the compressive force, a deeper
10 and a more diffuse modification of the geometry of the
elastomeric body and, substantially, a very high flexibility
with a corresponding low value of elastic reaction and a high
damping effect will be determined.

15 The present invention will be better understood by the
following detailed description made by way of non-limiting
example, with reference to the figures of the accompanying
sheets of drawings in which:

20 figure 1 shows a perspective view of the shock-absorbing
device in its more general aspects;

figure 2 represents in perspective view a preferred
alternative embodiment of figure 1;

25 figure 3 represents an axial section of the device in a
loading condition;

figure 4 represents the device of figure 1 applied to a
30 suspension.

The device 1 of the invention comprises an elastomeric body,
in the example of figure 1 it is represented in the form of a

1 cylinder placed between two end plates, comprising a
plurality of cavities 2, distributed along planes transversal
to the axis X-X aligned with the direction of the force or
with the resultant of the forces to be damped; said cavities
5 2 that in an example are radially directed, pass through the
thickness of the elastomeric material and the cavities of a
transversal plane are offset and partially overlapped with
respect to the cavities of the adjacent transversal planes.

10 The cavities of a transversal plane are separated from the
cavities of the immediately underlying transversal plane by
means of a thickness of elastomeric material 3.

According to the essential principle of the invention the
15 portion of elastomeric material 4 separating two cavities
adjacent in one plane is arranged substantially in central
position with respect to the width of the cavity of the
immediately underlying transversal plane.

20 Preferably, the cavities have a narrow section shape, for
example rectangular, radiused at the corners, ovoidal, in the
form of two ovoidal cavities radiused by a cylindrical
portion, in the form of a rhomb with radiused corners. The
cavities, still for example, can have initial sections
25 different from those of the figure and then under the work
loading can assume a substantially flat configuration with
walls perpendicular to the direction of the axis X-X.

In a further preferred embodiment of the invention, the
30 elastomeric body 1 is constituted by a plurality of
cushioning pads, one of which is shown in figure 2 with
number 5.

1 Each cushioning pad 5, comprises on two overlapped planes a
plurality of cavities 2, moreover the cushioning pad of
elastomeric material is delimited in the upper and in the
lower parts by two armours 6 and 7 of plastic or of metal.

5

The various cushioning pads are associated to one another up
to form the elastomeric material 1 of desired height and are
joined with one another since the opposite armours comprise
suitable ribs and grooves for a mutual centering operation.

10

The elastomeric body 1 in order to form the wished shock-
absorbing device can comprise a plurality of unities, each
unity being formed by overlapping various cushioning pads 5;
in this case the various unities are mounted among them in
15 parallel.

The shock-absorbing device according to the invention can
have a shape different from that shown in figures 1 and 2,
for example a parallelepiped shape, maintaining in all the
20 various possible realizations the conditions of cavity 2,
separated from the portions full of elastomeric material
disposed in central position with respect to the width of the
cavities present in an immediately underlying plane.

25 In one of the many possible examples, it has been represented
in figure 3 the behaviour, in the presence of a compressive
force, of an elastomeric body having a square or rectangular
plan. The deformation of the body is represented very
schematically in figure with dotted line.

30

In figure 3, H indicates the value of the thickness of the
full elastomeric layer 3 separating the cavities of two
different planes, L indicates the width of a cavity, l

indicates the width of the full elastomeric forming the separating element comprised between contiguous cavities lying in one same plane.

- 5 As shown in said figure 3 the portion A-A of elastomeric material acts as a beam subjected to a load distributed for a width l with supports constituted by the portions of elastomeric material 4; by modifying the geometric parameters H , L , it is possible to vary the thickness and the free
10 length of the beam so as to obtain a very forced flexibility for the whole structure of the elastomeric body.

Therefore, starting from a compound having a determined hysteresis value and removing the elastomeric material of the
15 body 1, provided with the cited cavities 2 having a pre-determined geometry, subsequently modified as it has just been explained, it is possible to obtain a high compressibility of the elastomeric material, and since to a high compressibility there corresponds a low elastic
20 reaction, it is produced a high absorption of energy with a modest return of said energy and definitely it is reached an efficacious damping effect of the force deforming the elastomeric body.

- 25 The aforementioned shock-absorbing device can be used in various applications, among which here there are cited those relating to the suspensions of an oscillating mass: for example the device is now described in connection with the suspension of a single support engine connected to the
30 chassis of a motor vehicle.

In this case the suspension 8 (figure 4) comprises an elastic element 9, for example a metallic helical spring or a low

1 hysteresis cylinder of elastomeric material introduced in the
central hole of the elastomeric body 1 of figure 1.

As low hysteresis element it is possible to use natural,
5 sylicone rubber and like material, using for the material of
the shock-absorbing body 1 a compound of high hysteresis hard
rubber, for example styrene or butyl rubber.

The body 1 and the element 9 have the ends associated to a
10 support 10 connected to the chassis of the motor vehicle.

The upper end of the low hysteresis element 9 i on its turn
associated to an upper plate 11 integral with the mass M of
the engine.

15

The connections between body 1 and element 9 with the metal
parts of the motor vehicle are of known type according to
diffused techniques with regard to the rubber-metal bonding.

20 In the conditions of figure, the element 9 is in substantial
compression conditions and the elastomeric body 1 has its own
upper end far from the plate 11.

In the operation, the low hysteresis element 9 constitutes
25 the part of the suspension apt to elastically react against
the oscillations in stationary conditions of the mass of the
engine, determining practically the frequency to which the
engine can oscillate so as fixed by the builder.

30 The elastomeric body 1 constitutes instead the part of the
suspension whose intervention takes up when the plate 11 in
consequence of an unexpected oscillation of great amplitude,
generally at low frequency, begins to compress the

1 elastomeric body 1.

As explained with reference to figure 3, in this case the energy transmitted by the oscillation of the mass is absorbed
5 in the deformation work of the initial geometry of the cavity 2 and the returned energy constitutes a very modest percentage with respect to the starting one since the rigidity of the body 1 has been strongly attenuated by the removal of material for the formation of the cited cavities
10 making thus the body 1 yielding and consequently endowed with a low capacity to elastically react against the deforming cause.

The low hysteresis element 9 has then the further function to
15 bring once again the plate 11 to the stationary conditions.

Further embodiments, in addition to that which has been described up to now, fall within the field of protection of the present invention.

20

In the realization of figure 4, the element 9, for example a metallic spring, could be placed with the turns outside the elastomeric body 1.

25 Moreover there could be provided to arrange a metallic spring 9 and an elastomeric body 1 with axes parallel to one another instead that concentric as shown in figure 4.

Also the scheme of figure 4 could be used, for example, for
30 the suspensions of the back wheels of a motor vehicle; in this case the low hysteresis elastomeric element and the high hysteresis elastomeric body 1 are still arranged between a fixed support and an oscillating mass and i.e. between a

- 1 cross-member or like element integral with the wheel hubs and
to the chassis of the motor vehicle.

The invention overcomes all the drawbacks of the known
5 devices. In fact, the present invention does not provide
during operation, relative slidings between the parts as in
the shock-absorbing devices based oin phenomena of
dissipation of energy due to friction.

- 10 Therefore the invention produces the advantage of a longer
life, not being present those wear problems connected to the
cited relative sliding among the parts.

The present invention with respect to the fluid-dynamic
15 dampers provides the advantage of not having constant
viscosity connections between an oscillating mass and a
supporting frame.

- As known in the fluid-dynamic dampers the bond of a constant
20 viscosity liquid determinates noise problems.

The object of the invention not having bonds of hydraulic
type, but only of elastomeric type, have the advantage with
respect to the fluid-dynamic dampers of being greatly
25 noiseless, this characteristic being more and more required
in the automotive field.

The invention presents moreover a clear improvement with
regard to all the shock-absorbing devices comprising an
30 elastomeric material having a full section with high
hysteresis. In fact, contrary to what could happen in the
mentioned device of the state of the art, in presence of a
compression load, no phenomena of lateral bending due to

1 buckling load takes place; in fact, the device according to
the present invention through the cavities 2 obtained in the
elastomeric body 1 attenuates greatly its rigidity in axial
sense. In practice, the shock-absorbing device of the
5 invention under load becomes compressed varying its volume,
just contrary to what happened in the known devices having
full section, which owing to the fact of not changing in
volume can undergo possible dilatations of the intermediate
parts under the load effect with consequent unacceptable
10 interference risks of shock-absorbing parts having the means
arranged all around, for example with the metallic springs
of the suspensions of a motor vehicle.

Although some particular advantageous embodiments of the
15 invention have been described, it is understood that the
invention includes in its scope any other alternative
embodiment accessible to a technician of this field and
deriving from the above indicated inventive principle.

20

25

30

1 WHAT IS CLAIMED IS:

1. Shock-absorbing device (1) comprising a body of elastomeric material having an axis aligned with the direction of the force to be damped, characterized by the fact that said body comprises a plurality of cavities (2) distributed along planes transversal to said axis, said cavities being arranged through the thickness of the elastomeric material, the cavities of each transversal plane being arranged at a distance in axial direction, offset and partially overlapped with respect to the cavities of the adjacent transversal planes, the portion of elastomeric material (4) comprised between two adjacent cavities in one same transversal plane being arranged substantially in central position with respect to the width of the cavity of the immediately underlying transversal plane.

2. Device as in claim 1, characterized by the fact that the cavities of said body have a substantially flat shape.

3. Device as in claim 1, characterized by the fact that said body is constituted by a plurality of cushioning pads (5) of elastomeric material comprising cavities, said pads being overlapped among them, and each pad being delimited between two armours (6), (7).

4. Device as in claim 1, characterized by the fact of comprising in combination with said body of elastomeric material an elastic element (9), said element being arranged in compression state between a suitable support (10) and an oscillating system (M), said body (1) of elastomeric material being associated at one extremity to said support (10) and having the opposite extremity at a distance from said

1 oscillating system.

5. Device as in claim 4, characterized by the fact that said elastic element is a low hysteresis elastomeric material.

5

6. Device as in claim 4, characterized by the fact that said elastic element is natural rubber.

7. Suspension (8) for engine characterized by the fact of
10 comprising a body of elastomeric material (1) having an axis aligned with the direction of the force to be damped and an elastic element (9), said body comprising a plurality of cavities (2) distributed along planes transversal to said axis, said cavities being arranged through the thickness of
15 elastomeric material, the cavities of each transversal plane being arranged at a distance in axial sense, offset and partially overlapped with respect to the cavities of the adjacent transversal planes, the portion (4) of elastomeric material comprised between two cavities adjacent in the same
20 transversal plane being arranged substantially in central position with respect to the width of the cavity of the immediately underlying transversal plane, said elastic element (9) being disposed between a support (10) and a plate (11) to which there is associated the engine and being
25 disposed between said support and said plate in compression state, said body of elastomeric material being arranged with one extremity associated to said support and having the opposite extremity at a distance from said plate associated to the engine.

30

8. Suspension as in claim 7, characterized by the fact that said elastic element is constituted by a metallic cylindrical spring.

- 1 9) Suspension as in claim 3, characterized by the fact that
said body of elastomeric material has a cylindrical shape and
is disposed around said elastic element.

5

10





15

20

25

30

1/1

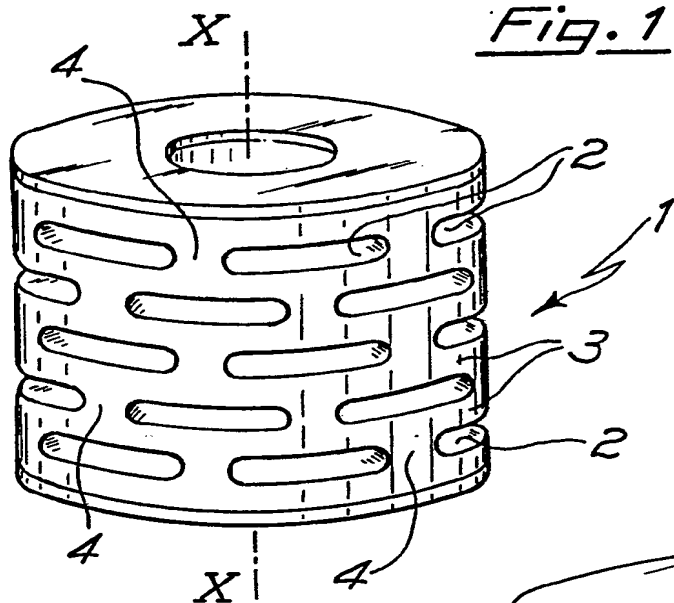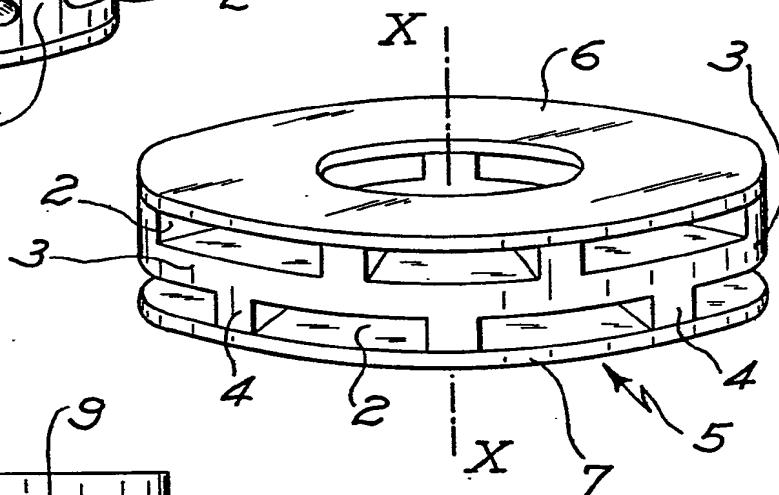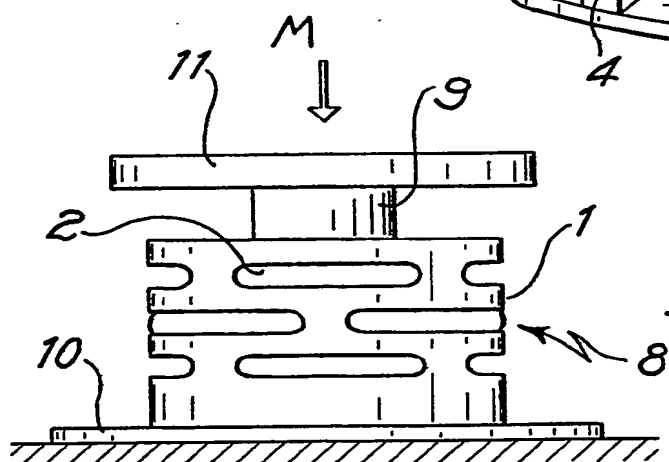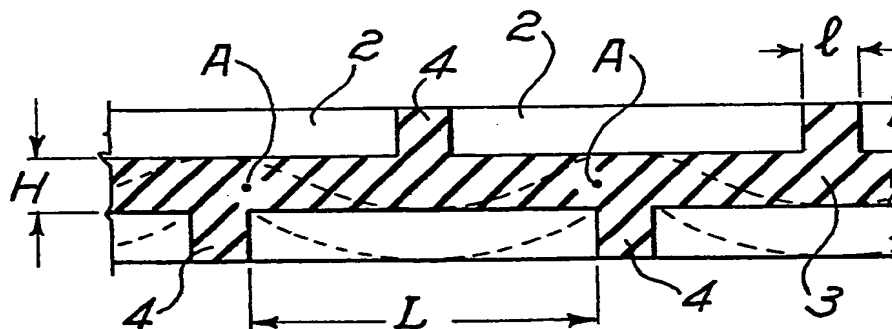Fig. 1Fig. 2Fig. 4Fig. 3

-2- BASIC DOC. - 1
European Patent Office

Office européen des brevets

Publication number:

0 110 233
A3

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number: 83111389.9

㉑ Int. Cl.⁴: F 16 F 1/44
B 60 G 11/22

㉒ Date of filing: 14.11.83

㉓ Priority: 29.11.82 IT 2448382

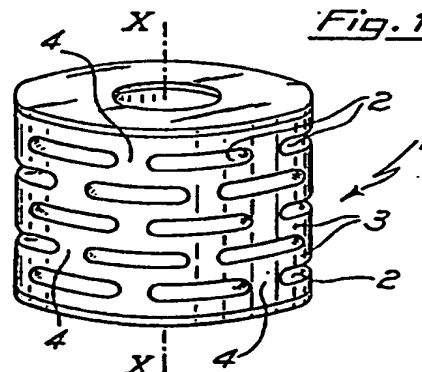
㉔ Date of publication of application:
13.06.84 Bulletin 84/24

㉕ Date of deferred publication of search report: 17.04.85

㉖ Designated Contracting States:
DE FR GB㉗ Applicant: INDUSTRIE PIRELLI S.p.A.
Piazzale Cadorna 5
I-20123 Milan(IT)㉘ Inventor: Tangorra, Giorgio
Via Ramazzotti 12
Monza (Milan)(IT)㉙ Representative: Mariani, Giorgio, Dr. et al,
INDUSTRIE PIRELLI S.p.A. Direzione Brevetti Piazzale
Cadorna, 5
I-20123 Milano(IT)

㉚ Shock-absorbing device.

㉛ Shock-absorbing device (1) comprising an elastomeric body provided with a plurality of cavities (2) arranged on transversal planes of the body; the cavities of one plane are offset with respect to the cavities of the adjacent planes. The portion of elastomeric material (4) comprised between two adjacent cavities in one same transversal plane is arranged substantially in central position with respect to the underlying cavity.



EP 0 110 233 A3



European Patent
Office

EUROPEAN SEARCH REPORT

0110233

Application number

EP 83 11 1389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	US-A-2 322 193 (KAEMMERLING) * Page 2, left-hand column, line 33 - right-hand column, line 27; figures 8,10-14 *	1-3	F 16 F 1/44 B 60 G 11/22
X	BE-A- 441 260 (PIRELLI) * Whole document *	1-3	
X	GB-A- 619 168 (DUNLOP) * Page 4; figures 1-5 *	1-3	
X	GB-A-1 189 563 (S.A.G.A.) * Whole document *	1-4	
A	FR-A-2 257 822 (SATURINI) * Page 6, lines 27-35; figures 1-6 *	1,2	
A	GB-A-2 029 546 (MESSERSCHMITT-BÖLKOW-BLOHM) * Page 1, lines 6-14; page 3, lines 18-33; figure 8 *	1-3,7	F 16 F B 60 G B 60 K 5/12
A	GB-A-2 004 621 (JORN) * Page 2, line 120 - page 3, line 98; figures 1-10 *	4-7	
A	GB-A- 671 798 (FIAT) * Whole document *	7-9	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21-12-1984	Examiner ESPEEL R.P.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503 03/82



European Patent
Office

EUROPEAN SEARCH REPORT

0110233

Application number

EP 83 11 1389

Page 2

DOCUMENTS CONSIDERED TO BE RELEVANT			Page 2
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
P	DE-A-3 151 508 (DAIMLER-BENZ) * Pages 1-4; figures 1-9 *	4-7	
A	FR-A-2 428 768 (SACATEC)		
A	FR-A-1 090 004 (ARQUEMBOURG)		
A	US-A-3 191 896 (NATHAN)		
A	DE-A-2 504 165 (VKI RHEINHOLD)		
A	DE-A-2 446 186 (HALENE)		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl. 7)
Place of search THE HAGUE		Date of completion of the search 21-12-1984	Examiner ESPEEL R.P.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO Form 1503 03/82

(10)

This Page Blank (uspto)